


50 Гц n= 2900 об/мин HS= 0 м




Допуск характеристик в соответствии с EN ISO 9906 Grade 3.

Обратный клапан


HS = Высота всасывания

The diagram shows a blue pump unit with a motor on the right. A vertical pipe connects the pump's inlet to a water source below ground level. An arrow indicates water being drawn up into the pump. A check valve is located on the pipe just above the water level. A vertical dimension line labeled 'HS = Высота всасывания' indicates the height from the water surface to the pump's centerline. Another pipe exits the top of the pump, with an arrow pointing to the right.

ПОЛ. ДЕТАЛИ НАСОСА		КОНСТРУКТИВНЫЕ ХАРАКТЕРИСТИКИ				
1	КОРПУС НАСОСА	Чугун, патрубки с резьбой ISO 228/1				
2	КРЫШКА	Нержавеющая сталь AISI 304				
3	ГРУППА ЭЖЕКТОРОВ	Noryl GFN2V				
4	РАБОЧЕЕ КОЛЕСО	Латунь				
5	ВЕДУЩИЙ ВАЛ	Нержавеющая сталь EN 10088-3 - 1.4104				
6	МЕХАНИЧЕСКОЕ УПЛОТНЕНИЕ	Уплотнение	Вал	Материалы		
		Тип	Диаметр	Неподвижное кольцо	Вращающееся кольцо	Эластомер
		AR-12	Ø 12 мм	Керамика	Графит	NBR
7	ПОДШИПНИКИ	6201 ZZ / 6201 ZZ				
8	КОНДЕНСАТОР	Электронасос	Емкость			
		Однофазный	(230 В или 240 В)	(110 В)		
		JSWm 1C	10 µF 450 В	25 µF 250 В		
		JSWm 1B	10 µF 450 В	25 µF 250 В		
		JSWm 1A	14 µF 450 В	25 µF 250 В		
9	ЭЛЕКТРОДВИГАТЕЛЬ	JSWm: однофазный 230 В - 50 Гц с тепловой защитой, встроенной в обмотку. JSW: трехфазный 230/400 В - 50 Гц. ➡ Насосы с трехфазным двигателем имеют высокую эффективность класса IE2 (IEC 60034-30) – Изоляция: класс F. – Степень защиты: IP X4.				

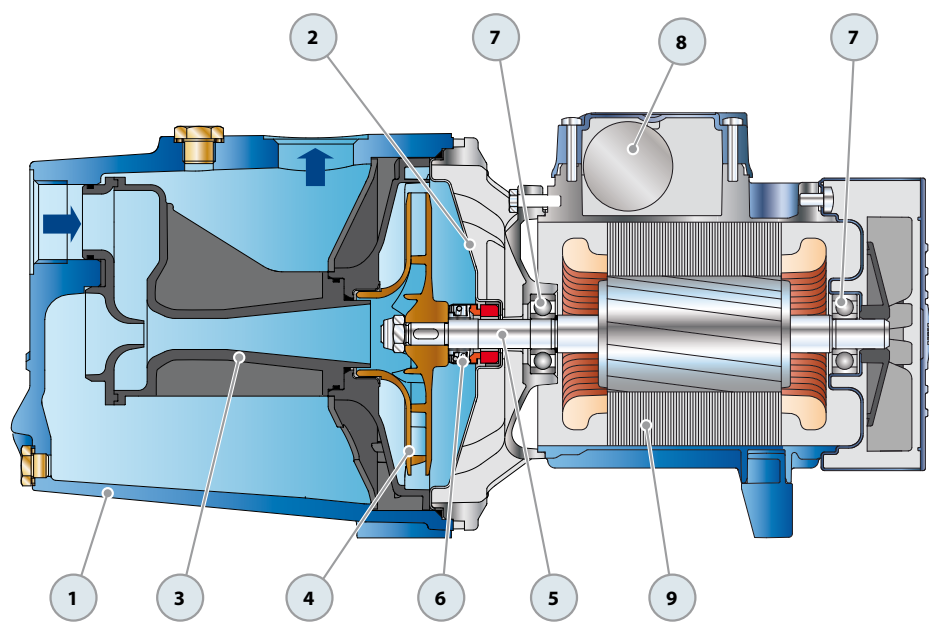

РАЗМЕРЫ И ВЕС

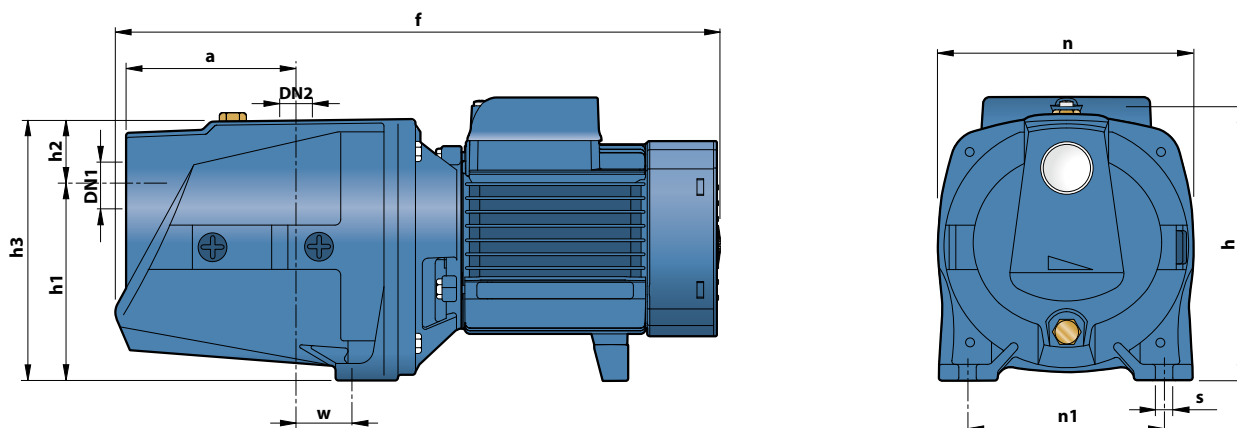

ТИП		ПАТРУБКИ		РАЗМЕРЫ мм										кг	
Однофазный	Трехфазный	DN1	DN2	a	f	h	h1	h2	h3	n	n1	w	s	1~	3~
JSWm 1C	–	1"	1"	115	379	171	127	33.5	160.5	160	124	24	10	9.2	–
JSWm 1B	JSW 1B													10.0	9.5
JSWm 1A	JSW 1A													10.3	10.1

ПОТРЕБЛЯЕМЫЙ ТОК

ТИП	НАПРЯЖЕНИЕ (однофазное)		
Однофазный	230 В	240 В	110 В
JSWm 1C	2.4 А	2.2 А	4.8 А
JSWm 1B	3.2 А	2.9 А	6.5 А
JSWm 1A	3.6 А	3.3 А	7.3 А

ТИП	НАПРЯЖЕНИЕ (трехфазный)					
Трехфазный	230 В	400 В	690 В	240 В	415 В	720 В
JSW 1B	2.1 А	1.2 А	0.7 А	2.0 А	1.2 А	0.7 А
JSW 1A	2.8 А	1.6 А	0.9 А	2.7 А	1.6 А	0.9 А